



Model Name RM7502K


Unique selling point

- * Brilliant UHD resolution image quality
- * Eye-care technology to deliver a zero-flicker viewing experience with ultra-low blue light emission
- * Built-in annotation software EZWrite 5
- * Account management system (AMS) provides personalized workspace


Panel	Screen Diagonal	75"	
	Backlight	DLED	
	Resolution	3840 x 2160	
	Aspect Ratio	16 : 9	
	Brightness	350nits	
	Contrast Ratio	1100:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	8ms	
	Panel bit	10-bit	
	Light life	30,000hrs	
	Orientation	Landscape	
Touch solution	Touch tech.	IR	
	Number of touches	Up to 20 Point Multi-touch	
	Touch interface	USB (type B) x 2	
	Resolution	32767 x 32767	
Cover glass	Thickness	Tempered, 4 mm	
	Hardness	7H	
	AG coating	75%	
Speaker	Built-in speaker	16W x 2	
Interface	Input	Power (AC) Inlet	x 1
		Audio line-in	x 1
		Composite video	No
		Composite audio	No
		Component video (RCA)	No
		D-sub	x 1
		HDMI	x 3 (2.0 x 3)
		Type A (USB Playback)	x 5 (USB 2.0 x 2 + USB 3.0 x 3)
		RS232	x 1
		S-video	No
		SPDIF	x 1
		LAN	x 1
	Output	Microphone	No
		RS232	No
		HDMI	x 1
		Line out (3.5mm)	x 1
		COAX	No
	Others	NFC Reader/Writer	No
		IR receiver	x 1
	Mechanical	Dimension (WxHxD) (Without Packing / With Packing)	1709.4 x 1062 x 115.8mm / 1920 x 1205 x 280mm
Net Weight/Gross Weight		54.4Kg / 71.1Kg	
Power	Power supply	AC100 to 240V, 50 / 60 Hz	
	Power consumption	320W (max.)	
OSD	On-Screen Display Languages	English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korean / Turkish (26L)	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord	By Region
		Touch pen	x 2
		Quick Start Guide	x 1
		Touch Cable (USB to USB)	x 1
		HDMI cable	x 1
		VGA(D-sub 15pin) Cable	x 1
Wall mount	x 1		

Input/output terminals

on

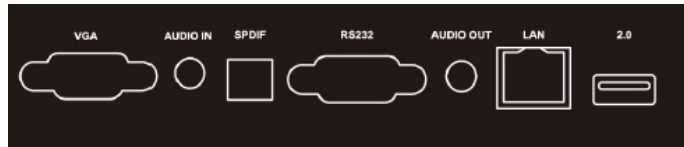


Wallmount

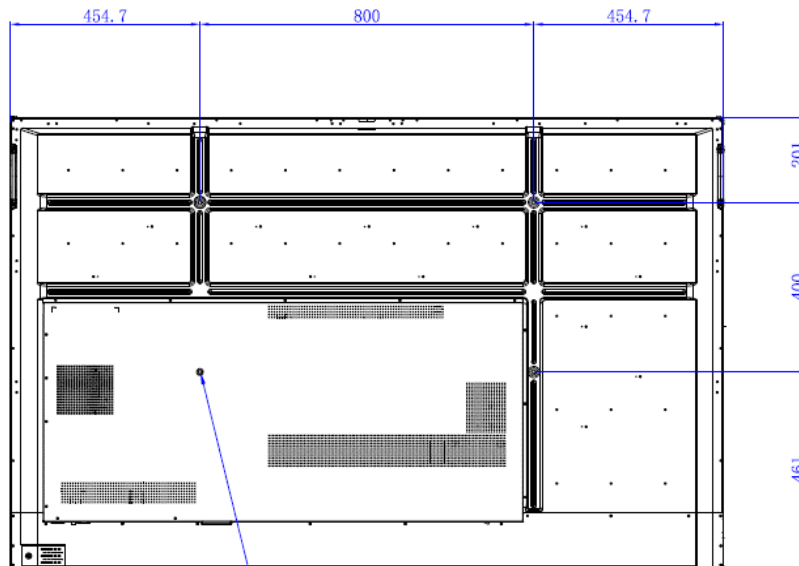

WALL MOUNT SCREW THREAD
DEPTH: 4-M8*25L

Dimension

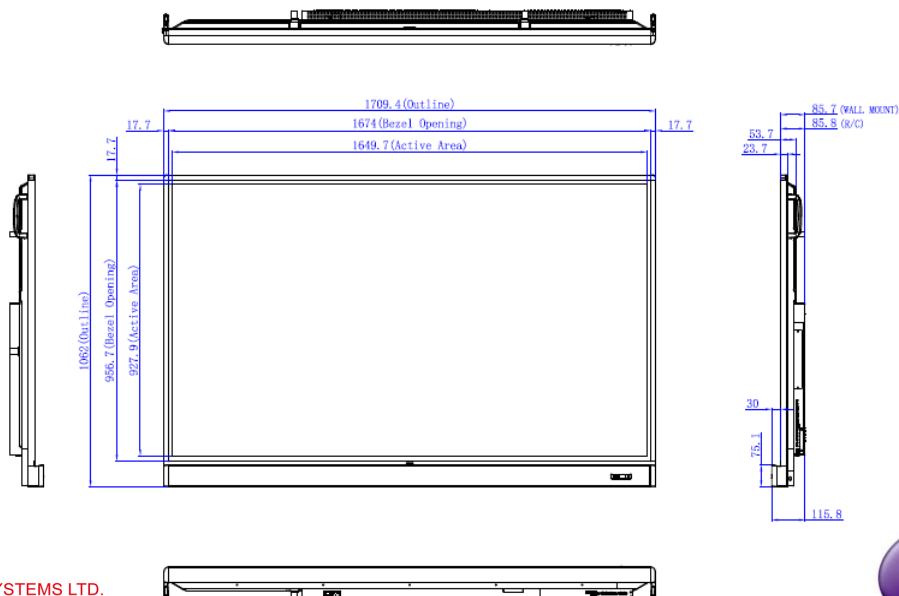

R & B COMPUTER SYSTEMS LTD.
力衡電腦系統有限公司

2749 3325

www.rnb.com.hk
rnb@rnb.com.hk

Unit 1009, Global Gateway Tower, 63 Wing Hong Street, Cheung Sha Wan, Kln., HK
香港九龍長沙灣永康街 63 號 Global Gateway Tower 1009 室

