

Clear, Smooth Communication

High Brightness 4500lm

NEW XD600U

Ecological & Cost-efficient

Stand-by Mode under 1W*¹


Stand-by (low) mode power consumption is less than 1W, offering increased energy savings and further contributing to environmental preservation.

*1 Stand-by mode with network turned off, 3W in normal mode with network turned on.

Long 5,000hr*² Lamp Life

By increasing the estimated lamp life, we've added the advantages of lower maintenance and reduced operating cost.

■ Lamp Replacement Frequency*³

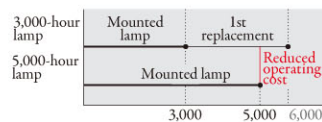

*2 When used in low lamp mode. Maximum lamp life in standard mode use is 3,000 hours.

*3 Lamp life refers to the average time required for brightness to be reduced by half, and not the time specified in the warranty. Lamp service life may vary widely depending on the environment and conditions, and whether or not cleaning and other maintenance procedures are followed.

Filter-free

DLP™ projectors are structurally airtight, eliminating the need for an intake filter under normal conditions, and lowering costs.



Exceptionally Quiet

Silent 29dBA Operation (in low mode)

Like giving a presentation in a suburban residential area in the middle of the night! That's the operating sound level promised by the XD600U.




MOBILE XGA PROJECTOR
XD600U

Brilliant Color™	Color Enhancer	Wall Screen	10W Speaker	User Logo Projection	Password Lock	Instant Shutdown	Picture Performance Presentation User-friendly
Long-life Lamp	Low Stand-by Power	Top/Side Loading Lamp	LAN (RJ-45)	HDMI	Closed Caption	Low Fan Noise	

Other Special Features

High brightness 4500lm and high contrast 2000:1

A high brightness and a high contrast level for presentations in large meeting rooms and conference halls.

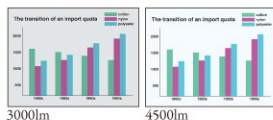

High-power projection – Distance increased 1.5x

The XD600U is equipped with a specially calibrated lens for high-power projection. Projection distances from 1.7 to 2.6m (68in to 102in) are possible using a 60-inch screen, and brilliant, crystal-clear images are assured even when projection distance is short.

Top-loading lamp for easier maintenance

The projection lamp is installed in the upper section of the main body. Whether sitting on a shelf or suspended from the ceiling, lamp replacement is simple and easy*, and there's never a need to move the whole projector.




*A lamp replacement attachment is included to prevent the lamp from being dropped during replacement.

Loud 10W built-in speaker

A high-volume, 10W speaker is built-in, eliminating the need for an external speaker.

Loud 10W built-in speaker + Audio Mix





Microphone capability with mixing input audio source

Using the "Audio Mix*" feature and wireless microphone sold separately, the presenter's voice is reproduced loud and clear in real-time.

*Only compatible with stereo mini-jack. Not compatible with RCA jack (L/R) or HDMI.

Visual PA broadcasting of various written messages

Using a control room computer equipped with projector-control software, simultaneously send messages (up to 350 characters long) in real-time to projectors connected to the LAN. Ideal for broadcasting important information to multiple rooms in schools or office buildings.

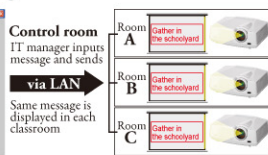

3D READY – Enjoy the future today


Experience the impact and allure of 3D images. The 3D video content must be in field sequential format and special electronic shutter glasses are required.

Specifications

Model	XD600U
Display technology	0.7" 1-chip DMD
Resolution	1024 x 768 (total 786,432 pixels)
Brightness	4500lm
Contrast ratio	2000 : 1
Picture size	40" - 300"
Throw ratio	1.4 - 2.1
Source lamp	230W (shut-off time 5000hr) in low mode, 280W (shut-off time 3000hr) in standard mode
PC compatibility	640 x 480 - 1280 x 1024, True : 1024 x 768, sync on green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component video; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
Input terminals	RGB; mini D-sub 15pin x 2 Video; RCA x 1, S-VIDEO x 1 Digital; HDMI x 1 Audio; stereo mini jack (ø3.5mm) x 2, RCA jack (L/R) x 1
Output terminals	RGB; mini D-sub 15pin x 1 Audio; stereo mini jack (ø3.5mm) x 1
Communication terminal	RS-232C; mini DIN 8pin x 1, LAN; RJ-45 x 1
Audio speaker	10W mono
Dimensions (W x H x D)	345 x 129 x 270 mm / 13.6 x 5.1 x 10.6 inch
Weight	3.6kg / 7.9lbs
Power requirements	AC 100-240V, 50/60Hz
Optional lamp	VLT-XD600LP

• Compliance with ISO21118-2005
• All brand names and product names are trademarks, registered trademarks or trade names of their respective holders

Screen Size and Projection Distance

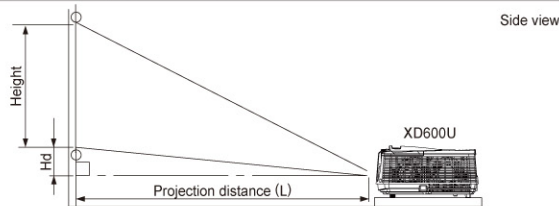


Screen size chart (4:3 aspect ratio)

Diagonal size	Screen				Distance from screen (L)				Height projected image (Hd)		
	inch	cm	inch	cm	inch	m	inch	m	inch	cm	
40	102	32	81	24	61	45	1.1	67	1.7	3.6	9
60	152	48	122	36	91	68	1.7	102	2.6	5.4	14
80	203	64	163	48	122	91	2.3	137	3.5	7.2	18
100	254	80	203	60	152	115	2.9	171	4.3	9.0	23
150	381	120	305	90	229	173	4.4	258	6.5	13.5	34
200	508	160	406	120	305	231	5.9	344	8.7	18.0	46
250	635	200	508	150	381	289	7.3	431	10.9	22.5	57
300	762	240	610	180	457	348	8.8	517	13.1	27.0	69

The above numbers are approximate, and may be slightly different from the actual measurements.

Input and Output Terminals

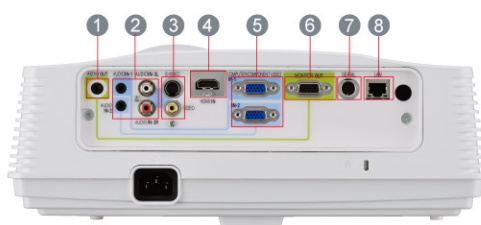

- 1 Audio output
- 2 Audio input
- 3 S-Video/Video
- 4 HDMI
- 5 PC/Component video input
- 6 Monitor output
- 7 Serial RS-232C
- 8 LAN (RJ-45)

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about XD600U and our projectors, visit us at

Global.MitsubishiElectric.com/projectors/



R & B COMPUTER SYSTEMS LTD.

力衡電腦系統有限公司

2749 3325

www.rnb.com.hk
rnb@rnb.com.hk

14/F., Vogue Centre, 696 Castle Peak Road, Lai Chi Kok, Kln., H.K.
香港九龍荔枝角青山道 696 號時采中心 14 樓 Fax : 23973768

Specifications subject to change without notice.