

Engaging Presentation



Interactive Learning



TRU TOUCH *FB Series*

Product Specifications

Model Name	TT-6517FB	TT-7017FB	TT-7517FB	TT-8017FB
Active Screen Size ("inch)	65"	70"	75"	80"
Display Backlight	LED			
Display Area	1428.5 x 803.5mm	1538.88 x 865.6mm	1650 x 973mm	1771.2 x 996.3mm
Display Ratio	16:9			
Resolution	1920 x 1080 Pixel			
Display Colors	10bit			
LCD Brightness	370cd/m2			
Contrast Ratio (Typical)	4000:1			5000:1
Response Time (Typical)	8ms			
Viewing Angle	178°			
Life Time (working hours/day)	Minimum 30,000 hours			
Power Consumption Max.	Maximum <220W		Maximum <250W	
Touch Surface Material	Tempered glass			
Touch Surface Technology	Anti-Glare glass			
Transparency	88%			
Touch Sensor	Infrared Touch			
Touch Points	10 Points			
Touch Screen Writing Tools	Nano Pen (>6mm width) included or Finger			
Cursor Speed	125 Points/s			
Positioning Accuracy	1mm			
Communication Interface	USB-B			
Speaker Position	Forward			
Speaker Max.Power Output	15W*2			
Transmission Range	5M			
Android System	5.0.1			
Installation Method (optional)	Wall-mounted / Floor Stand			
Outline Dimension	1544.03 x 939.1 x 99.1 mm	1658 x 1004 x 99 mm	1768 x 1066 x 114 mm	1900 x 1139x 118.7 mm
Packing Dimension	1705 x 1080 x 265 mm	1816 x 275 x 1118 mm	1923 x 1215 x 280 mm	2035 x 1275 x 275 mm
Net Weight	43 KG	50 KG	57 KG	71 KG
Gross Weight	57 KG	65 KG	77 KG	92 KG



Easily Write and Erase



Annotation



Record



Handwriting



Rugged



Easy of Use



Import Video



Android





HDMI

Product Advanced Features



Connectivity

Share everything by the way you like to use, not only physical cable to input but also wireless solution.

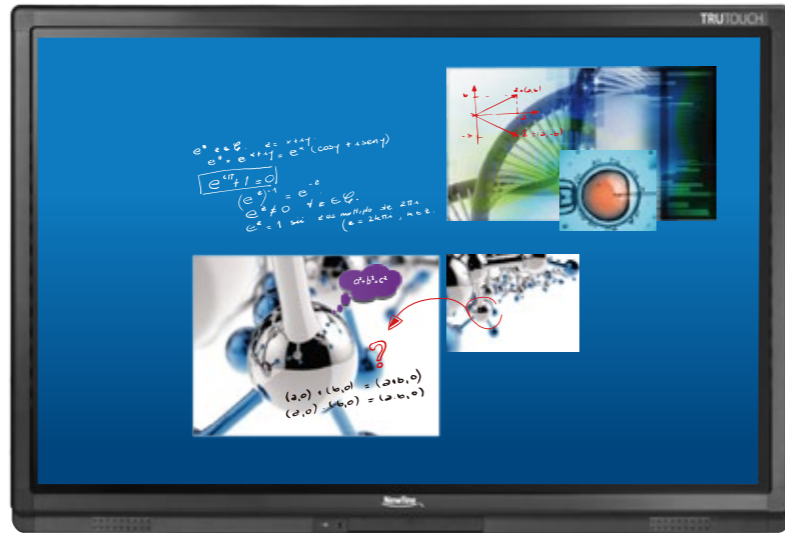

Zero Training Easy Operation


With its simple user interface no training needed to learn TRUTOUCH. Simply following the icon and use TRUTOUCH basic function without any difficulty.

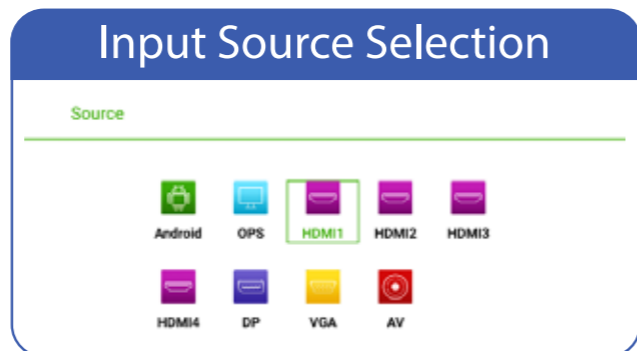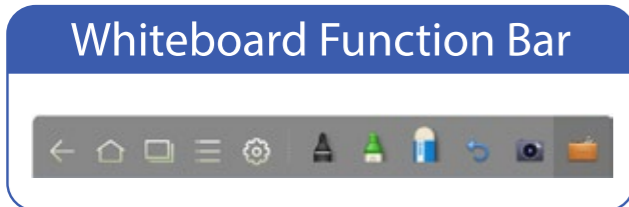

Excellent Resolution



Antiglare Glass

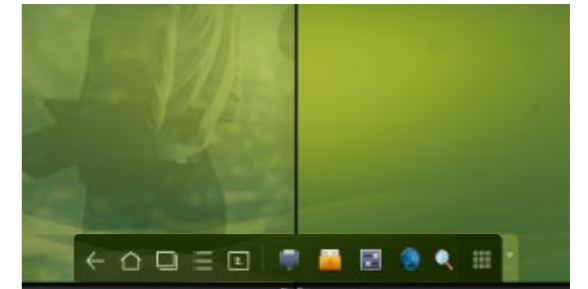

Responsive 10 points Touch

TRUTOUCH supports multi-touch to 10 points. Creating the interaction environment for conference room.



Integrated Sound Bar



Plug & Play



Support Multiple Input & Output

TRUTOUCH allows users to share information by their own devices. You may find all of the major I/O ports on TRUTOUCH front sides and rear sides as well.

VGA	HDMI	TOUCH-USB	Micro SD	USB	AUDIO
IN x 1	IN x 4, Out x 1	x 4	IN x 1	Android x 2 PC x 2	Audio In (VGA) x1 Audio Out x 1 Earphone x1
MIC	DisplayTouch	RS232	LAN	AV-IN	
IN x 1	IN x 1	x 1	x 2	x 1	