

Think GAIA  
For Life and the Earth

**SANYO**

## Ultra Portable Multimedia Projector

PLC-XW60



Small enough to carry with one hand,  
perfect for those on-the-go!



### Light Weight and Compact

The compact and lightweight body (264.0 (W) x 55.0 (H) x 188.0 (D) mm and 1.6 kg) offers great portability. (not including protruding parts)

### Brightness of 2,000 Lumens

With the compact, light-weight body, the projector provides a brightness of 2,000 lumens. This allows for clear projection even in a small meeting space or conference room.

### Optical 1.2x zoom lens with short focal length

PLC-XW60 is equipped with a zoom lens that allows screen size adjustment. The optical zoom hardly deteriorates the image quality. The short-focus type lens allows large screen image projections with a short throw distance. PLC-XW60 enables 100-inch screen projection at the shortest distance of 2.7 m.

### Easy Setup Function

PLC-XW60 provides "Auto Setup Function" that corrects keystone shape distortion by searching for an input signal and detecting projector incline, reducing setup time. Furthermore, the "Screen Guidance Function" allows projector set up according to the displayed guidance. This function provides beginning users an easy guide to projection.

### Auto Vertical Keystone Correction

The PLC-XW60 automatically compensates for keystone picture distortion.

NOTE: Correction range varies depending on operation settings such as lens shift ratio, lens zoom magnification and so on. On-screen image size after correction is smaller than that of original. The correction range is up to 20 degrees.



### Two D-sub Terminals

The PLC-XW60 has two D-sub input terminals. One of these can be switched and used as a monitor output terminal.



### Lamp Replacement on Top Cabinet

Lamp replacement is performed by accessing the top cabinet. During installation on a ceiling, the lamp can be replaced with the projector hung on the ceiling.

### Screen Color Mode

In addition to the black board (green) mode, the PLC-XW60 provides four color (red, blue, green, yellow) board modes, enabling easy projection\* without using an ordinary screen.

\* The projected image color may be different from input signal color.

### Filter Slide Mechanism

The filter can be removed with "one-touch", enabling easy cleaning and replacement.

### Power-Off and Go

No need to wait for the projector to cool down. The power cord can be disconnected right after your presentation.

### On-Start Function

The power turns on as soon as you connect the power cord. No need to press any buttons on the remote control or projector.

### Other Features

- Closed caption (NTSC) • 16 language operation menu • Freeze function
- Customizable start-up logo • User logo function • No show function
- Presentation timer


### Specifications

Model name	PLC-XW60
Panels	0.63-inch TFT p-Si x 3
No. of pixels	2,359,296 (1024 x 768 dots)
Projection lamp	165 W UHP
Brightness (typical)	2000 lm
Uniformity	85 % (corner to center)
Projection lens	F1.77 - 1.99, f = 17.4 - 21.1 mm
Screen size	40" - 300" 1.1-10.0 m (100" at 2.7 - 3.3 m)
Zoom / Focus	1:1.2 manual driven, U:D = 6:1
HDTV signals	480i, 480p, 575i, 575p, 720p, 1035i, and 1080i
Color systems	PAL / SECAM / NTSC / NTSC4.43 / PAL-M/N
Video signal	Composite, S-Video, Component
Video terminals	RCA x 1 ; Composite video, D-sub 15 pin for component input*
Computer compatibility	UXGA / WXGA / SXGA / XGA / SVGA / VGA / MAC analog
Computer terminals	D-sub for input, D-sub 15 pin for input or monitor out
Audio	RCA (L/R) for video input Mini-Jack (stereo) for computer input Mini-Jack (stereo) for output (variable)
Communication terminals	Service Port (RS-232C)
Presentation tools	Freeze / Digital Zoom / No Show / etc.
Other features	Progressive, 3-2 & 2-2 pull down, User logo
Scanning frequency	H sync: 100 kHz, V sync: 100 Hz, Dot clock: 110 MHz
Sound output	1.0 W Mono
Voltage	100 V - 240 V AC (auto voltage)
Dimensions (W x H x D)	264.0 x 55.0 x 188.0 mm (not including protruding parts)
Weight	1.6 kg
Main accessories	Removable power cord (2.3 m), Wireless remote control (AAA battery x 2), D-sub cable, PIN code label, Owner's manual, Carrying case


\* For use with optional cable POA-CA-COMPVGA

• Design of the product, specifications are subject to change without notice.

### External dimensions (unit: mm)

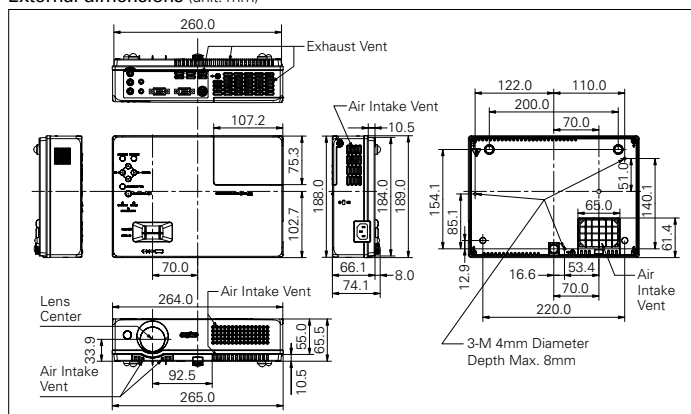

### Approximate throw distance/ picture size

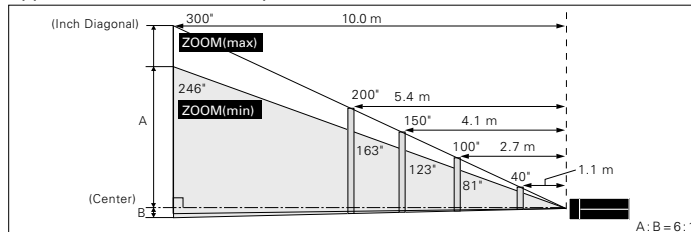

Screen Size (W x H) mm	40"	100"	150"	200"	300"
4 : 3 aspect ratio	813 x 610	2032 x 1524	3048 x 2286	4064 x 3048	6095 x 4572
Zoom (min.) Tele	1.3 m	3.3 m	5.0 m	6.1 m	10.0 m
Zoom (max.) Wide	1.1 m	2.7 m	4.1 m	5.4 m	8.2 m

Approximate throw distances shown above were calculated on lens design specifications. Please note that up to 5% deviation may result due to lens variation.



All products manufactured by the Projector Integrated Business Unit of SANYO's DI Company employ a quality management system that has undergone the inspection and registration process of the ISO 9001:2000 international standard.



SANYO's DI Company has received ISO 14001 certification for the environmental management system used in its factory.



Pixelworks ICs are used in this projector

<http://www.sanyo-lcdp.com/english/>

**Caution:** Please consult the instruction manual to ensure safe and proper operation of the product.

Distributed by:



R & B COMPUTER SYSTEMS LTD.  
力衡電腦系統有限公司

2749 3325

[www.rnb.com.hk](http://www.rnb.com.hk)  
[rnb@rnb.com.hk](mailto:rnb@rnb.com.hk)

14/F., Vogue Centre, 696 Castle Peak Road, Lai Chi Kok, Kln., H.K.  
香港九龍荔枝角青山道 696 號時采中心 14 樓 Fax: 23973768



SANYO Electric Co., Ltd.  
DI Company

©2008 SANYO Printed in Japan 2008.3 MA  
SML112