

Made for even brighter ideas.



- 2,500 ANSI-lumens
- Contrast 2,000:1
- BrilliantColor™



DLP™ and the DLP logo are registered trademarks of Texas Instruments
and BrilliantColor™ is a trademark of Texas Instruments



Display	0.55" DMD™ Chip
Resolution	XGA 1.024 x 758
Brightness	2,500 ANSI-lumens
Colour reproduction	16.7 million colours
Contrast	2,000:1
Projection format	4 : 3 switchable to 16 : 9
Lamp	180 W (TLPLV9LAMP)
Max. lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 2.4 - 2.6 / f = 21.8 - 23.8 mm, manual focus and zoom
Zoom	1.1 x
Frequency (hor./vert.)	31 - 69 kHz/56 - 85 Hz
Projection	front, rear and ceiling
Digital keystone correction	manual vertical
Picture size (diagonal)	0.6 - 7.7 m
Projection distance	1.0 - 12.0 m
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA (compr.)
Inputs	1 x RGB (D-sub 15), 1 x S-video, compo- site video (RCA), 1 x RGB audio stereo mini jack


Outputs
Serial interface
Power supply
Loudspeaker
Dimensions (W x H x D)
Weight
Operation noise
Specials

Accessories

Options

Menu guidance

RGB, audio
RS-232C
AC 100 - 240 V, 50 / 60 Hz
2 W Mono
270 x 98 x 198 mm
2.2 kg
normal 35 dB / ECO mode 32 dB
BrilliantColor™, auto setup,
keystone correction, RJ45 via adapter,
digital 16 : 9 image shift
remote control with batteries, owners
manual, RGB- and power cable, softcase
ceiling mount, spare lamp,
RJ45 control adapter, camera c001
21 languages: English, French, German,
Italian, Spanish, Portuguese, Russian,
Swedish, Turkish, Polish, Danish, Czech,
Hungarian, Dutch, Finnish, Norwegian,
Romanian, Indonesian, Greek,
Chinese (simple/traditional)

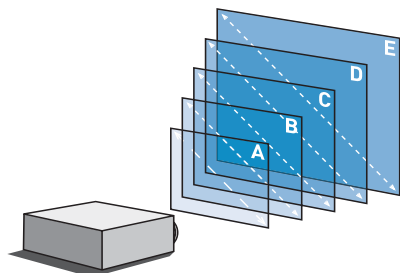

Picture size	Projection distance
A 0.76 m	1.15 - 1.28 m
B 1.52 m	2.37 - 2.62 m
C 2.54 m	3.98 - 4.41 m
D 5.08 m	7.97 - 8.82 m
E 7.62 m	11.88 m