

# EP4610T

**46" DIGITAL SIGN BOARD  
WITH INTERACTIVE TOUCH**

## Interactive High – Definition Digital Poster

In-store "Way-Finding" is easy with ViewSonic's new interactive ePoster display solution. With its drift free 4K x 4K touch interface and vivid screen resolution, retail messaging and image navigation is easy with the all-in-one EP4610T ePoster. Simply connect the output of your PC to the versatile input ports and common USB port for your touch interface and your application comes alive. ViewSonic's ePoster display can easily connect to a corporate network by adding a network media player. Security is achieved through the locking back cover.



> **46" full HD ePoster featuring 1920x1080 resolution and tempered glass faceplate for screen protection**

> **Interactive built-in "two-points" IR touch panel features 4096x4096 touch resolution for accurate selection of data**


> **All-in-One design provides easy customer deployment with no required construction**

> **Internal RISC media player with 2GB CF storage for playing JPEG images and digital video files**


> **Built-in power outlet and mounting cradle for adding your own media player**

> **Applications:**  
**RETAIL ADVERTISING**  
**WAY-FINDING**  
**HOSPITALITY**  
**EDUCATION**

# EP4610T 46" DIGITAL SIGN BOARD WITH INTERACTIVE TOUCH

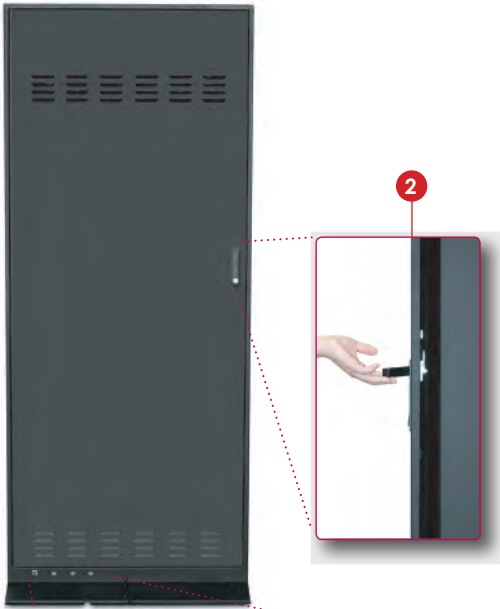

<b>DISPLAY</b>	Diagonal	46" (116.84 cm)	
	Resolution	1920x1080 pixel resolution	
	Color	Over 16.7M color (depending on video card used)	
	Brightness	450 cd/m <sup>2</sup> (typ)	
	Contrast Ratio	4000:1 (typ)	
	Response Time	8 ms (gray-to-gray)	
<b>TOUCH SCREEN</b>	View Angle	Up and down 178°, left and right 178° (typ) @ CR>10	
	Touch Mode	One point click, long press right click, double click, draw	
	Resolution	4096x4096 dots	
	Response Time	8ms	
	Supports OS	Windows® 7/2000/XP/Vista	
<b>CONNECTIVITY</b>	Interface	USB 2.0 (full speed), USB 1.1 port HID compliant	
	I/O Ports	HDMI, VGA, YPbPr, USB (x3), A/V, RJ45 Pigtail	
<b>INTERNAL</b>	Storage	2GB CF card	
	Media Player Supports	Video: MPEG 1/2/3, H.264, Xvid 1.00-AVI, MP4 Photo: JPEG Audio: WMA, MP3, M4A (AA CC) Clock and timer	
	<b>AUDIO</b>	Speakers	5W (x2)
	<b>POWER</b>	Supply	3.2-1.38 A @ 100-240VAC, 50/60Hz
Consumption		260W (max)	
Save		Off < 1W	
<b>OPERATING CONDITIONS</b>	Temperature	32-104° F (0-40° C)	
	Humidity	20-90% (non-condensing)	
<b>STORAGE</b>	Temperature	-4-140° F (-20-60° C)	
<b>ENVIRONMENT</b>	Humidity	10-90% (non-condensing)	
<b>DIMENSIONS (WxHxD)</b>	Physical	27.80" x 76.84" x 19.68" (706mm x 1950mm x 500mm)	
<b>WEIGHT</b>	Net	264.5 lbs. (120 kg)	
	Gross	286.60 lbs. (130 kg)	
<b>REGULATIONS</b>		FCC, ICES 003, CE	
<b>PACKAGE CONTENTS</b>		ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD	

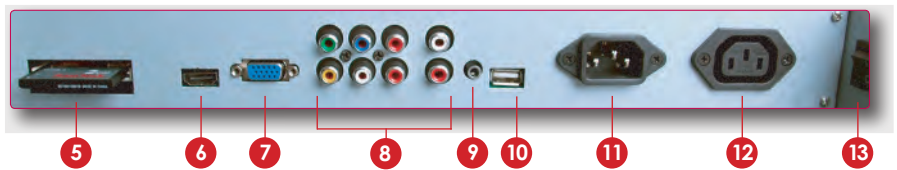

- |                                     |                                 |
|-------------------------------------|---------------------------------|
| 1 - 1920x1080 Resolution            | 7 - VGA Input                   |
| 2 - Security Latch/Handle           | 8 - YPbPr/Composite Video/Audio |
| 3 - RJ45 Ethernet LAN port          | 9 - PC Audio                    |
| (extension to optimal media player) | 10 - USB Port                   |
| 4 - 3x USB 2.0 Ports                | 11 - AC Power Male Port         |
| 5 - 2GB CF Card Storage             | 12 - AC Power Female Port       |
| 6 - HDMI Port                       | 13 - Power On/Off               |



Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2011 ViewSonic Corporation. All rights reserved. [15946-008-11/11] EP4610T-1



**R & B COMPUTER SYSTEMS LTD.**  
力衡電腦系統有限公司

**2749 3325**

[www.rnb.com.hk](http://www.rnb.com.hk)  
rnb@rnb.com.hk

Unit B, 18/F, Billion Plaza 2, 10 Cheung Yue Street, Lai Chi Kok, Kln., H.K.  
九龍荔枝角長裕街 10 號億京廣場 2 期 18 樓 B 室 Fax: 23973768