

EP4610

VERSATILE VIDEO
46" DIGITAL SIGN BOARD

Impactful High-Definition Digital Poster


ViewSonic's new ePoster products make it easy to replace those old backlit printed signs with new impactful video messaging on high definition digital posters. These sleek new displays feature versatile input connections for easy content uploading or adding your favorite media player. Information is disseminated through the ePoster's video connectors via a media player or USB thumb drive. ViewSonic's new ePoster products are available in various sizes and slim profiles fit in beautifully with their limited footprint. Great for announcing special promotions, computer-generated information or communicating multimedia with photos, audio, signage, and video.






- > 46" Full HD 1920x1080 display resolution
- > 450 nits of brightness with 4,000:1 contrast ratio
- > Sleek tempered glass faceplate
- > Versatile video inputs (HDMI, VGA, YPbPr, USB)
- > Internal VESA® compliant mounting and power supply for adding media players
- > Easy loading of content through USB thumb drive
- > Compatible with the ViewSonic NMP-560 media player (Optional) Includes Signage Manager Express software
- > Audio 5wx2
- > Applications:
RETAIL ADVERTISING
TRANSPORTATION
HOSPITALITY
EDUCATION

ViewSonic®
See the difference® 

EP4610 VERSATILE VIDEO DIGITAL SIGN BOARD

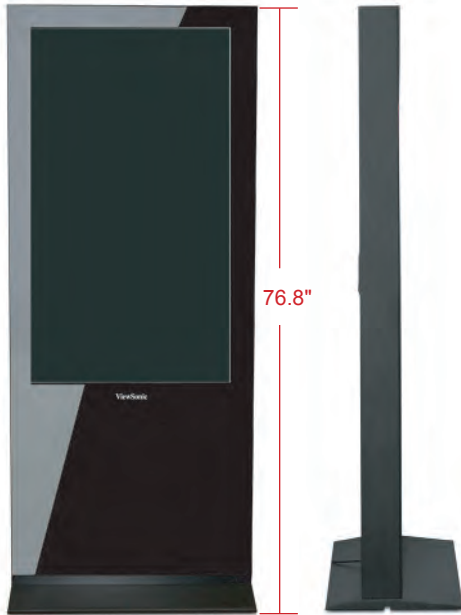

DISPLAY	Diagonal	46" (116.8 cm)
	Resolution	1920x1080 dots
	Color	Over 16.7M color (depending on video card used)
	Brightness	450 cd/m ² (typ)
	Contrast Ratio	4000:1 (typ)
	Response Time	8ms (gray-to-gray)
	View Angle	Up and down 178°, left and right 178° (typ) @ CR>10
CONNECTIVITY		HDMI, VGA, YPbPr, USB
INTERNAL STORAGE		2GB
AUDIO	Speakers	5W (x2)
POWER	Supply	3.2-1.38 A @ 100-240VAC, 50/60Hz
	Consumption	Max 240W
	Save	Off < 1W
OPERATING CONDITIONS	Temperature	32-104° F (0-40° C)
	Humidity	20-90% (non-condensing)
STORAGE ENVIRONMENT	Temperature	-4-140° F (-20-60° C)
	Humidity	10-90% (non-condensing)
DIMENSIONS (WxHxD)	Physical with Stand	27.8" x 76.8" x 19.68" (706mm x 1951mm x 500mm)
WEIGHT	Net	264.55 lbs. (120 kg)
	Gross	286.60 lbs. (130 kg)
REGULATIONS		FCC, ICES 003, CE
PACKAGE CONTENTS		ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD

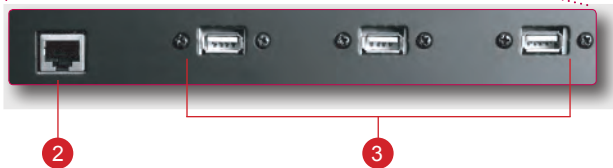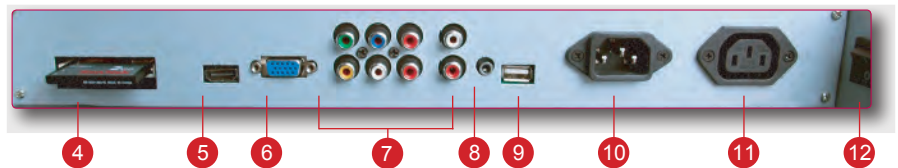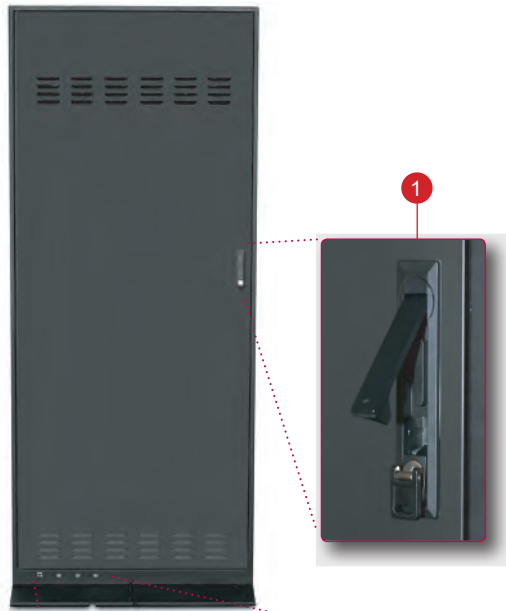

- | | |
|---------------------------------------------------------------------|----------------------------------|
| 1 – Security Latch/Handle | 7 – YPbPr/Composite Video/ Audio |
| 2 – RJ-45 Ethernet LAN port
(extension to optional media player) | 8 – PC Audio |
| 3 – 3x USB 2.0 Ports | 9 – USB Port |
| 4 – SD Card Reader | 10 – AC Power Male Port |
| 5 – HDMI Port | 11 – AC Power Female Port |
| 6 – VGA Input | 12 – Power On/Off |



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2012 ViewSonic Corporation. All rights reserved. [15993-00B-01/12] EP4610-1



R & B COMPUTER SYSTEMS LTD.

力衡電腦系統有限公司

☎ 2749 3325

🌐 www.rnb.com.hk
✉ rnb@rnb.com.hk

Unit B, 18/F, Billion Plaza 2, 10 Cheung Yue Street, Lai Chi Kok, Kln., H.K.
九龍荔枝角長裕街 10 號億京廣場 2 期 18 樓 B 室 Fax: 23973768